


HIGH STRENGTH CONNECTORS



8280 Pincer

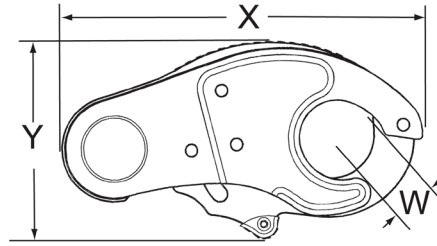

Sheet Stamping

100% proof loaded to 3,600 lbs (16kN)
 Min. tensile strength 5,000 lbs (22.2kN)
 Min. gate strength 3,600 lbs (16kN)
 Min. side load strength 3600 lbs (16kN)
 Gate marked "3.6m GATE"

Stock	Part #	Description	Material	Weight	W	X	Y	ANSI/ASSE Z359.12-2009 std.	CSA Z259.12-01 std.	EN 362:2004 std.	Box Qty
S	8280	3/4" High Strength Connector	Carbon Steel	10.7oz (302gm)	3/4" (19mm)	5 13/16" (148mm)	3 1/8" (79mm)	Certified	Certified	Certified	50

For finishes, refer to page vi.